

# UPRIGHT REACH-IN DUAL TEMPS

Top Mounted Condensing Unit



## ES – Series

• ESRFH2 • ESRF2A • ESWRF2 • ESWQ3 • ESRF3



ESRFH2



ESRF2A



ESWRF2



ESWQ3



ESRF3

### Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

### Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A and R-404A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Exterior anodized aluminum drain pan for self sufficient condensation removal
- Pressure relief ports for rapid re-entry
- Interior airflow back guard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

### Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles
- Door locks
- Field reversible doors (available from 2013 models except ESWQ3)

### Lighting

- Shielded incandescent interior lighting

### Shelving

- Epoxy coated wire shelves (see reverse page for shelf quantity)
- Stainless steel pilasters and shelf clips

### Temperature Control

- Factory preset temperature, 35°F for refrigerators and -4°F for freezers
- Temperature setting range from 33°F to 54°F for refrigerators and -10° F to 54° F for freezers
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature



• Project / Customer \_\_\_\_\_

• Item No. \_\_\_\_\_

• Model No. \_\_\_\_\_



**Warranty**

5 Year — Compressor Warranty

3 Year — Parts & Labor Warranty



**Contact**

201 W. Artesia Blvd, Compton, CA 90220

T. (310) 323-6586, (800) 444-6285

F. (310) 323-7524, (310) 761-1127

# UPRIGHT REACH-IN DUAL TEMPS

## Top Mounted Condensing Unit




**EVEREST**  
REFRIGERATION









### ES – Series

• ESRFH2 • ESRF2A • ESWRF2 • ESWQ3 • ESRF3

#### Dimensions



Two additional front adjustable stainless steel clad ABS legs for model ESRFH2 to provide extra stability when opening and closing doors.

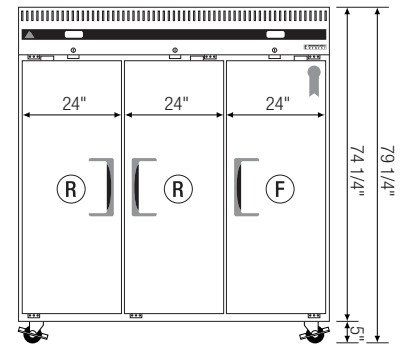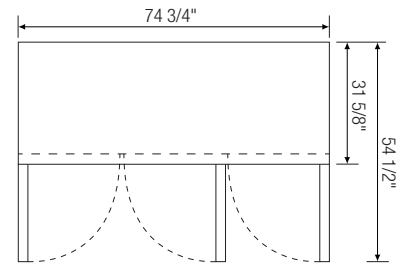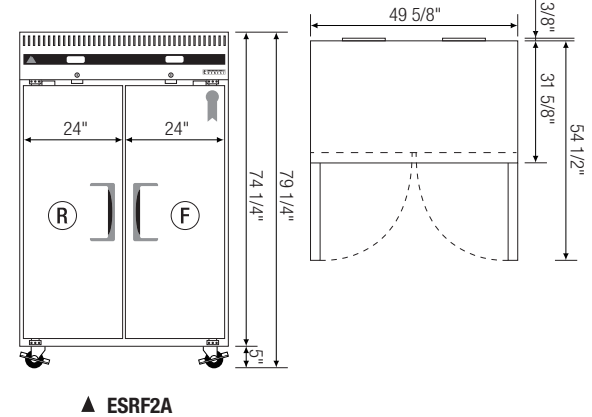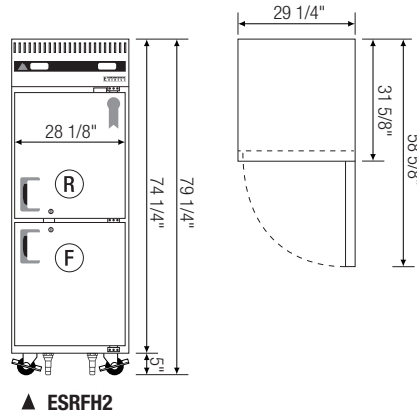

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for casters
										L	D	H *	
ESRFH2	Dual	2(H)	11(Ref) 11(Frz)	1/2	R-404A	2	115-60-1	7.57	329	29 1/4	31 5/8	74 1/4	* Ref = Refrigerator Frz = Freezer Dual = Ref & Frz Combo H = Half Door F = Full Door
ESRF2A	Dual	2	22(Ref) 22(Frz)	1/3(Ref) 1/2(Frz)	R-134A(Ref) R-404A(Frz)	6	115-60-1	11.94	478	49 5/8	32	74 1/4	
ESWRF2	Dual	2	26(Ref) 26(Frz)	1/3(Ref) 1/2(Frz)	R-134A(Ref) R-404A(Frz)	6	115-60-1	11.94	513	59	32	74 1/4	
ESWQ3	Dual	2(H) 1(F)	39(Ref) 13(Frz)	1/3(Ref) 1/3(Frz)	R-134A(Ref) R-134A(Frz)	5	115-60-1	11.94	510	59	31 5/8	74 1/4	
ESRF3	Dual	3	46(Ref) 22(Frz)	1/3(Ref) 1/2(Frz)	R-134A(Ref) R-404A(Frz)	9	115-60-1	12.39	612	74 3/4	31 5/8	74 1/4	

**Disclaimer:** Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

201 W. Artesia Blvd, Compton, CA 90220

Specifications subject to change without notice.

T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524, (310) 761-1127



Please visit our website for updated Energy Efficiency information